

仿石园林音箱系列安装使用说明


惠威公共广播系列

非常高兴您选 “HiVi” 仿石园林音箱系列,本产品是专为室外环境中使用而设计,仿造天然岩石精心制作,具有防雨、防潮、耐腐蚀、寒耐高温、耐冲击、造型独特等优点,广泛应用于工厂、别墅区、广场、公园、住宅小区、学校、旅游区等...

性能特点

- 全天候设计(防水、耐热、耐盐、抗硫),可在多种特殊环境下长期使用;
- 高灵敏度、高声压级设计,宽广的频响覆盖范围;
- 声音清晰纯净,轻松应对各种背景音乐和语音扩声需求;
- 简约大方的外观设计,能与各种场合完美融合;
- 配有完善的安装配件,使安装更为简便迅速;
- 秉承惠威一贯的HI-END理念,让音乐无处不在。

安装尺寸

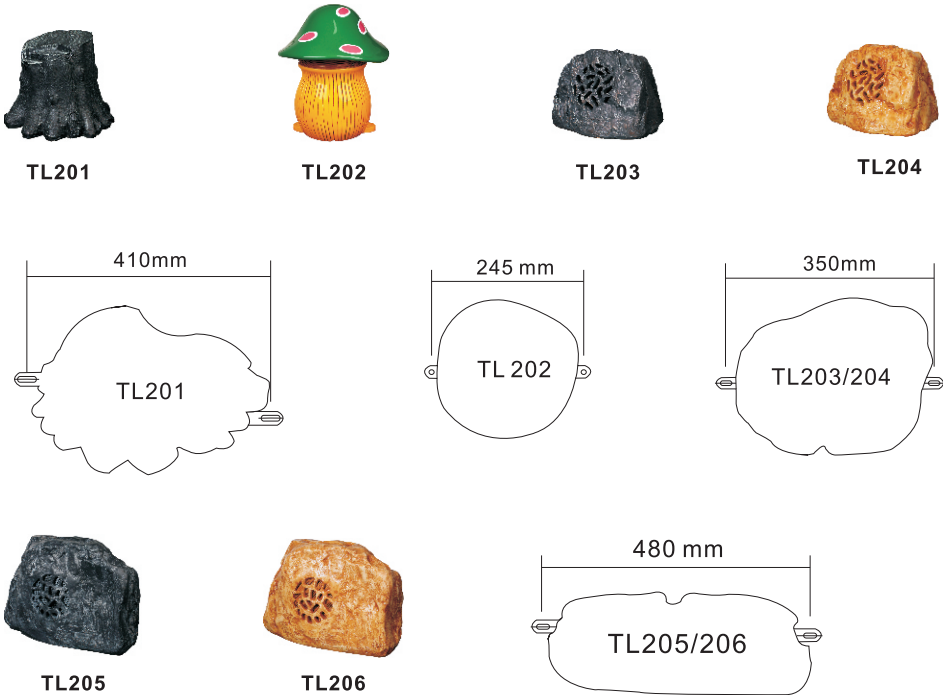


参 数

型 号	TL201	TL202	TL203	TL204	TL205	TL206
全频/高频喇叭	6.5"X1,1"X1	6.5"X1,1"X1	5.25"X1,1"X1	5.25"X1,1"X1	6.5"X1,1"X1	6.5"X1,1"X1
额定功率	20W	20W	15W	15W	20W	20W
最大功率	40W	40W	30W	30W	40W	40W
输入电压	70 /100V	70 /100V	70 /100V	70 /100V	70/100V	70/100V
灵敏度	91dB	90dB	90dB	90dB	91dB	91dB
频响范围	75-18KHz	75-15KHz	85-18KHz	85-18KHz	75-18KHz	75-18KHz
最大声压级	101dB	100dB	100dB	100dB	102dB	102dB
尺 寸	380X375X305	Φ 420X450	320X282X210	320X282X210	430X172X310	430X172X310
重 量	4.3kg	5.5kg	4.4kg	4.4kg	4.7kg	4.7kg

附 件: Φ6×16mm不锈钢机械螺丝、M6介子、不锈钢脚架;

安装指引

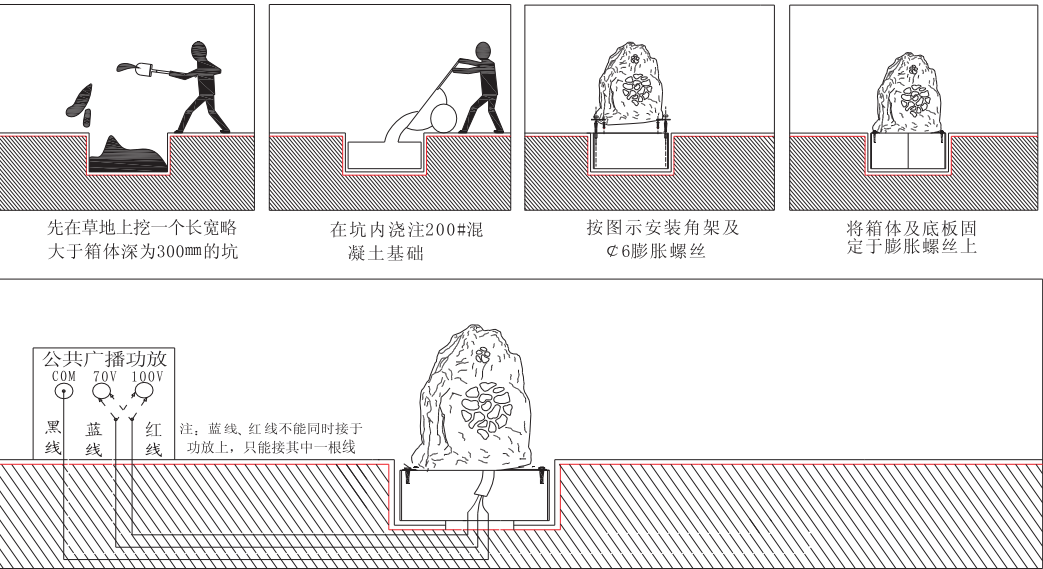

可选其中一类功放按以上图示接线,接头做好防水措施。建议在产品周围铺上草皮,以增加美感

警 告

- 1、本产品需专业人员进行安装,非专业人员切勿自行安装;
- 2、接电源线时必须按产品电缆线上的接线标示图连接;
- 3、错接或接法不当将导致严重后果(如损坏功放或烧喇叭);
- 4、如将公共广播功放与家庭功放线错接时音箱一样会发出声音并且音量有时还大些,此时长期使用将烧坏喇叭(扬声器);
- 5、产品处于室外环境时,产品外壳破碎后不能使用,需更换后方可 通电工作

※ 因设计变更等原因,所示资料可能与实物不符,恕不另行通知



HiVi Simulation rock sound box installation menu


HiVi Public Address Speaker Series

Thank you for purchasing HiVi Simulation rock sound box System, The speakers are suitable for outdoor such as manufactory, villa district, plaza, park, housing district, school, tourist area, etc. The speakers have such feature: waterproof, sunscreen, salt-tolerance, striking resistant and sulfur resistance.

Feature

- It is suitable for outdoor applications (waterproof, sunscreen, salt-tolerance and sulfur resistance). It works in kinds of special environments for long-term.
- High sensitivity, high SPL, wide frequency response coverage.
- Sound clear and pure, and be easy to deal with a variety of background music and voice sound reinforcement demands.
- Simple and elegant design, the perfect combination to all kinds of situations.
- With installation parts, be easy and quick for installation.
- Upholding the HI-END ideas of HiVi, let the music around you.

Mounting size

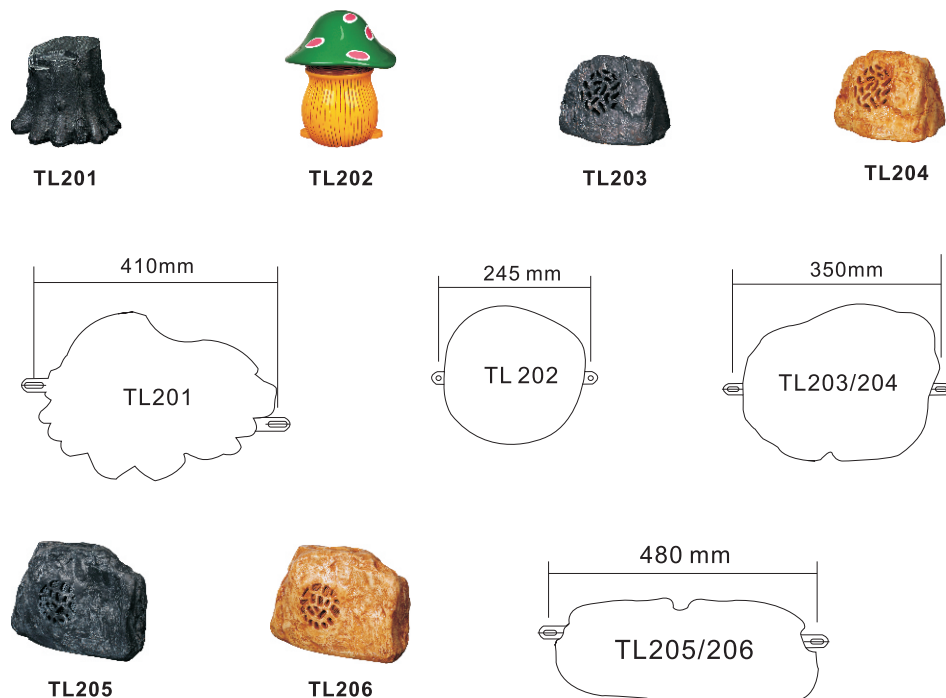


Specification


Model no	TL201	TL202	TL203	TL204	TL205	TL206
Full range/ high frequency speaker	6.5"X1, 1"X1	6.5"X1, 1"X1	5.25"X1, 1"X1	5.25"X1, 1"X1	6.5"X1, 1"X1	6.5"X1, 1"X1
Nominal power handling	20W	20W	15W	15W	20W	20W
Max power handling	40W	40W	30W	30W	40W	40W
Input voltage	70/100V	70/100V	70/100V	70/100V	70/100V	70/100V
Sensitivity	91dB	90dB	90dB	90dB	91dB	91dB
Resonance Frequency	75-18KHz	75-15KHz	85-18KHz	85-18KHz	75-18KHz	75-18KHz
Max SPL	101dB	100dB	100dB	100dB	102dB	102dB
Dimensions	380X375X305	Φ 420X450	320X282X210	320X282X210	430X172X310	430X172X310
Weight	4.3kg	5.5kg	4.4kg	4.4kg	4.7kg	4.7kg

Enclosure: stainless steel mechanical screws, misoton, stainless steel footed base.

Installation diagram

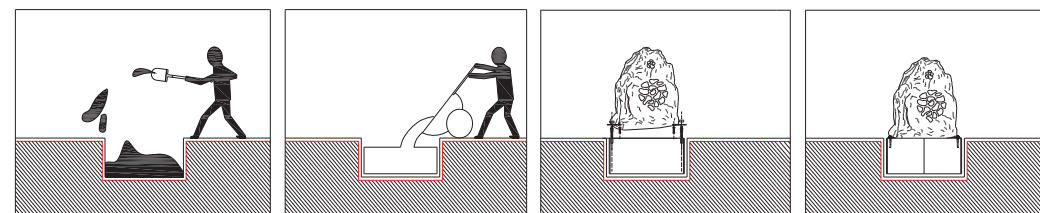

1. Dig a pit in the grass. Length and width are larger than the sound box dimension slightly, and deep is 300MM. (picture1)
2. Pouring the concrete foundation of the 200 # in the pit (picture2)
3. Fix the footed base and setscrew according to picture3.
4. Fix the sound box and baseplate on the setscrews (picture4)

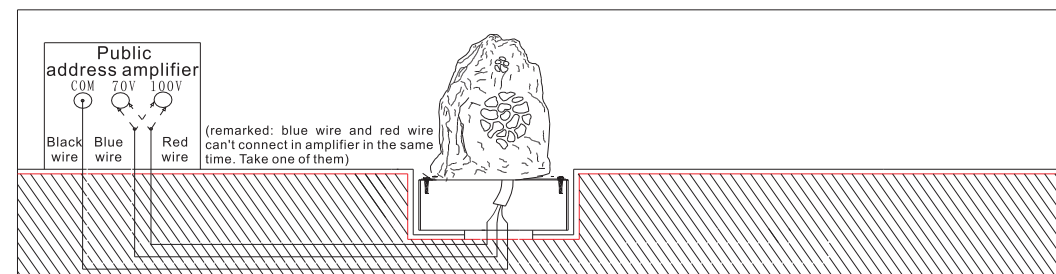

Take one of them (public address amplifier and household amplifier) to connect the power wire. Waterproof measures should be taken for connector. It is artistic to sown the grass around the sound box.

Warning

1. Be installed the speakers by professional electrician. Not to be installed by yourself.
 2. Connect the power wire must according to Connection indicator diagram.
 3. Wrong connected or connected incorrectly can cause serious consequences (such as damage to the amplifier or speakers)
 4. If you misconnect the power wire for public address amplifier and household amplifier, the speakers work also, and sometime you will find the sound volume is bigger. But the speakers will damage when they work in long time.
 5. If the sound box is installed in the outdoor and the shell is broken, you need to change the shell before power on.
- ※ Because of the design change, the illustration may not conform to the practicality. We will not inform again!